



浙江佳德包装机械有限公司
ZHEJIANG JIADE PACKING MACHINERY CO.,LTD.

地 址: 浙江省温州平阳县万全工业区万盛路6号
电 话: 0577-63081885 63081886 63081887
外贸部: 0577-63080877 传 真: 0577-63081889
Http://www.jiademachine.com
E-mail:jiadebj@jiademachine.com

Add:No.6, Wansheng Road, Wanquan Industrial Zone,
Pingyang County, Wenzhou, Zhejiang Province,China
Tel: 0086-577-63081885 63081886 63081887
Export Department: 0086-577-63080877
Fax: 0086-577-63081889
Http://www.jiademachine.com
E-mail:jiadebj@jiademachine.com



JIADÉ® 佳德

©2023.10 Print

Wisdom Empowerment

Integrated smart packaging solution

智慧赋能 制药智能一体化包装解决方案

JIADÉ® 佳德 Since 2005

企业信念

Enterprise Belief

品正為佳
德行天下



JIADÉ® 佳德

公司概况 ABOUT COMPANY

公司使命

为客户提供智能、可持续性包装解决方案

公司愿景

打造国内包装机械第一品牌

核心价值观

诚信、创新、务实、和谐

浙江佳德包装机械有限公司创建于2005年，地处浙江省温州平阳万全工业区，是专业从事包装机械、制药机械、食品机械集科研、开发、生产、销售、服务为一体的科技型企业。本公司是制药装备行业协会会员，中国橡胶协会理事会员，率先通过了CE认证、ISO9001质量体系认证，先后获得“高新技术企业”、“专利示范企业”、“市级企业技术研究开发中心”、“科技型中小企业”、“科技（创新）型企业”、“浙江品字标”、“绿色企业”等荣誉称号。

我公司主要生产装盒机、高速装盒机、以及装盒机配套联线设备（铝塑泡罩装盒联线、枕包装盒联线、灌装装盒联线、颗粒袋装盒联线、西林瓶/安瓿瓶入托装盒联线、避孕套装盒联线、装盒透明膜联线、开箱装箱封箱整线等），公司秉承“品正为佳，德行天下”的企业精神，已形成完善的整机及其关键零部件的制造体系，设备的结构均处在行业的领先地位，强大而专业的技术、销售与售后服务人员，保证了我公司雄厚的技术力量，先进的生产设备，可靠的产品质量，良好的售后服务。

设备因自动化程度高，质优价廉，畅销扬子江药业、哈药集团、修正药业、太极集团、广药集团等多家制药、食品、医疗器械、化妆品美国内企业，并远销美国、比利时、俄罗斯、波兰、日本、澳大利亚、越南、泰国、印度、巴基斯坦等国家和地区，并深受广大用户青睐。

“佳德”产品是您的最佳选择，更是“德”力的助手。佳德人愿与新老朋友真诚的合作，携手共创辉煌。

Zhejiang Jiade Packaging Machinery Co., Ltd. was founded in 2005, located in Pingyang Wanquan Industrial Zone, Wenzhou, Zhejiang Province, is a scientific and technological enterprise specializing in packaging machinery, pharmaceutical machinery and food machinery integrating scientific research, development, production, sales and service. The company is a member of the Pharmaceutical Equipment Industry Association, a member of the Council of China Rubber Association, and has taken the lead in passing CE certification and ISO9001 quality system certification, and has successively won the honorary titles of "High-tech Enterprise", "Patent Demonstration Enterprise", "Municipal Enterprise Technology Research and Development Center", "Science and Technology Small and Medium-sized Enterprise", "Science and Technology (Innovation) Enterprise", "Zhejiang Product Mark", "Green Enterprise" and so on.

Our company mainly produces cartoning machine, high speed continuous cartoning machine and cartoning machine production line (blister+cartoning line, pillow+cartoning line, tube filling and sealing+cartoning line, sachet filling and cartoning line, ampoule/vial blister+cartoning line, condom cartoning line, cartoning+cellophane wrapping line, case erect+case filling+case sealing line and so on). Insisting to "high quality goods and moral world" enterprise spirit, it has formed perfect machine and key components manufacturing system, equipment structure as the leading position in this field. A strong and professional technology, sales and after sale service people to ensure that our company strong technical force and advance production equipment, reliable product quality, good after service.

Because of high automation equipment and good price, the products are well sold to not only domestic pharmaceutical, food, medical instrument, cosmetics enterprise as Suci Yangtze River Pharmaceutical Group, Harbin Pharmaceutical Group, Xiuzheng Pharmaceutical Group, Taiji Group, Guangzhou Pharmaceutical Group, but also overseas such as USA, Belgium, Russia, Poland, Japan, Australia, Vietnam, Thailand, India, Pakistan and other country, and received a good reputation from its users;

JI/DE is not only your best choice, but also right assistant.

JI/DE is looking forward to cooperate with all new and old customers and create a brilliant future.



佳德：开创美好明天的 包装领军企业

我们从未停止过努力，所有夯实的基础，只为超越自己，更近一步。研发团队创新，产品种类的齐全，不断追求的细节完美，服务的专业，都致力于满足您的每个要求和愿望。

所有零部件都是精挑细选，所有独特的ID。每件产品都经过极为严格的检测，甚至可查询到工程师审核签下的名字。它不仅代表独一无二的优秀品质，同时意味着它给您带来卓越的表现。我们从不自大，只做您最信赖的装盒设备专家。

We never stop hard efforts, all solid foundation just to surpass ourself and more developmental. Research and develop team's innovation, product variety completion, perfect detail constant seeking and professional service all are committed to meet everyone requirement and desire.

All components are carefully selected, all special ID and each product have been extremely rigorous detected and even can inquire engineer's signed name after auditing. It not only represents unique excellent quality, but also mean bringing you superior performance. We never arrogant, only become a best trusted equipment expert of cartoning machine.



18+

年
Years

经验的积累并非一蹴而就，而是厚积薄发。对佳德来说经验等于十余年的努力与奉献。装盒机、高速装盒机、以及装盒机配套联线设备广泛应用于国内外知名药企。

8+

大应用领域
Application Fields

应用行业覆盖制药行业，食品行业，日化行业，五金行业，汽配行业，塑料行业，文娱行业，橡胶行业等行业。

3000+

个成功服务案例
Successful Service Case

佳德有一个非常有特色的销售模式，就是个性化生产。根据每个用户的具体生产方式，结合产品的特点，我们提供个性化的定制。这种独一无二的方法客户非常满意，切实地解决了客户生产上的难题。这也正是佳德所要努力做到的，以客户为关注焦点，向客户提供最优化的解决方案。

为什么选择佳德装盒机?
Why choose cartoning machine from JIADE?



品牌力量 Brand
市场份额 Market
品种齐全 Varieties
质量可靠 Quality
服务周到 Services

JIADE® 佳德

公司发展历程

Company History

2005

创办瑞安市佳德包装机械有限公司
In 2005, founded "Ruian City Wenzhou Jiade Packing Machinery.,Ltd"

2006

建立公司，位于中洲工业区
In 2006, established company which load in Zhongzhou Industrial zone

2006

成为"中国制药装备行业协会会员"
In 2006, be awarded as a "China pharmaceutical equipment association"

2007

通过CE认证和ISO9001:2008认证
In 2007, passed CE certification and ISO9001:2008 quality system certification

2008

成为"中国橡胶工业协会会员"
In 2008, be awarded as a "China rubber industry association member"

2011

担任"中国橡胶工业协会理事会理事"
In 2011, acted as a "China rubber industry association council member"

2011

公司拥有出口权
In 2011, company was granted to import & export right

2011

被命为"2011度浙江省工商企业A级
守合同重信用单位"
In 2011, be awarded as a " Zhejiang keep contract and re-credit grade A business enterprise in 2011"

2012

获得多项发明和实用新型专利证书
In 2012, be awarded to number of inventions and practical new patent certification

2013

获得多项高速装盒机实用新型专利证书
In 2013, be awarded to number of high speed cartoning machine practical new patent certification

2013

更改为"温州佳德包装机械有限公司"
In July,2013 name was changed to "Wenzhou Jiade Packing Machinery Co.,Ltd"

2014

搬迁至平阳万全工业区
In 2014, moved to Wanquan Industrial zone in pingyang

2014

荣获国家高新技术企业、温州市科技（创新）型企业、浙江科技型中小企业
2014 won the national high-tech enterprises, Wenzhou science and Technology (innovation) enterprises, Zhejiang science and technology small and medium-sized enterprises.

2015

荣获国家火炬计划产业化示范项目企业
In 2015 won the national Torch Program industrialization demonstration project enterprise

2016

荣获温州市专利示范企业
2016 won Wenzhou Patent Demonstration Enterprise

2017

通过知识产权管理体系认证
In 2017, it passed the intellectual property management system certification

2018

成为中国计量大学·平阳工业设计院战略合作伙伴
In 2018, it became a strategic partner of China Jiliang University Pingyang Industrial Design Institute

2021

荣批准成为"品字标"团体标准，
并更名为"浙江佳德包装机械有限公司"
In 2021, it was approved as the group standard of "Pishi" and changed its name to "Zhejiang Jiade Packaging Machinery Co., LTD."

2022

取得计算机软件著作权，入选
浙江省首台（套）装备，
In 2022, it obtained the copyright of computer software and was selected as the first (set) equipment in Zhejiang Province.

2022

获得浙江省专精特新中小企业证书
In 2022, it won the certificate of Zhejiang Province Specialized and special new small and medium-sized Enterprise

2023

亮点与里程碑

Highlights & Milestone

秉承客户关注焦点为创业理念
佳德选择了与客户发展一脉相承的发展道路

Focus on Customer's attention as Business philosophy
JIADÉ choose the developing road in consistent with customer's development.

CONTENT 目录

- 13-14** JDL-550S 全伺服泡罩装盒生产线
JDL-550S Full Servo High-Speed Blister-Cartoning Packaging Line
- 15-16** JD-DPH-260 自动高速泡罩包装机
JD-DPH-260 Automatic High Speed Blister Packing Machine
- 17-18** JD-DPH-320S 自动高速泡罩包装机
JD-DPH-320S Automatic High Speed Blister Packing Machine
- 19-20** JDZ-600S 全伺服高速装盒机
JDZ-600S Full Servo High Speed Cartoning Machine
- 21-22** JDZ-450 全自动连续式高速装盒机
JDZ-450 Automatic High Speed Continuous Cartoning Machine
- 23-24** JDZ-320 全自动高速装盒机
JDZ-320 Automatic High Speed Cartoning Machine
- 25-26** JDZ-260 全自动连续式高速装盒机
JDZ-260 Automatic High Speed Continuous Cartoning Machine
- 27-28** JDZ-260P 全自动连续式高速装盒机
JDZ-260P Automatic High Speed Continuous Cartoning Machine
- 29-30** JDZ-180 连续式自动装盒机
JDZ-180 Automatic Continuous Cartoning Machine
- 31-32** JDZ-120 III 全自动卧式装盒机
JDZ-120 III Automatic Horizontal Cartoning Machine
- 33-34** JDZ-120P 全自动卧式装盒机
JDZ-120P Automatic Horizontal Cartoning Machine
- 35-36** JDZ-120D III 全自动卧式装盒机
JDZ-120D III Automatic Horizontal Cartoning Machine
- 37-38** JDZ-120 III 全自动立式装盒机
JDZ-120 III Automatic Vertical Cartoning Machine
- 39-40** JDZ-120P 全自动立式装盒机
JDZ-120P Automatic Vertical Cartoning Machine
- 41-42** JDZ-120D 全自动立式装盒机
JDZ-120D Automatic Vertical Cartoning Machine
- 43-44** JD-K760 全自动高速薄膜束带捆扎机
JD-K760 Automatic High Speed Film Bundling Machine
- 45** JD-RFW-380 全自动往复式包装机
JD-RFW-380 Reciprocating Automatic Packing Machine
- 46** JD-FW-300C 多功能全自动高速枕式包装机
JD-FW-300C Automatic High Speed Pillow Packaging Machine
- 47** JD-MOC-300 透明膜三维包装机
JD-MOC-300 Transparent Membrane Three-dimensional Packaging Machine
- 48** JD-MOC-500 透明膜三维包装机
JD-MOC-500 Transparent Membrane Three-dimensional Packaging Machine



JDL-550S
全伺服泡罩装盒生产线
Full Servo High-Speed Blister-Cartoning Packaging Line

概述:

JDL-550S全伺服泡罩装盒生产线是我公司引进国外先进技术的基础上自主创新设计的机型，并严格按医药行业“GMP”要求制造。

该生产线采用先进人工智能技术、更换规格可实现数字化输入调整；同步追踪系统、变换规格自动适应速比匹配；精准的检测系统确保药品的安全性。完善的保护系统使操作人员更安全。紧凑和简洁的外型设计大大节省了使用空间，使操作、维护更简便，性能更稳定，效益更高。

Applications:

JDL-550S Full servo Blister-cartoning Packaging line is designed by our company based on the foreign advanced technology, it is manufactured in strict accordance with the GMP requirements of the pharmaceutical industry.

This line adopts advanced artificial intelligence technology and replaces specifications to realize digital input adjustment; synchronous tracking system and conversion specifications automatically adapt to speed ratio matching; precise detection system ensures drug safety. A comprehensive protection system makes the operator safer. The compact and simple design saves space, makes operation and maintenance easier, performance is more stable and higher.



主要技术参数
Main technical parameter

JDL-550S

压缩空气		工作压力 Air Pressure		≥0.6mpa
Compressed air		耗气量 Air Consumption		≥0.75m ³ /min
电 源	Power supply			380V 50HZ
总功率	Main power			20kw
外形尺寸	Overall dimension(L×W×H)			9522×1685×2030mm
整机净重	Machine weight			约6500kg
泡罩机 Blister packing machine	泡罩产量		Output	200-550板/分钟
	最大成型深度		Forming depth Max.	12 mm
	最大成型面积		Die-cutting range Max.	180×250 (L×W) mm
	PVC(厚×宽)		PVC(thicknessx width)	(0.25-0.35) ×260 mm
	铝箔PTP(厚×宽)		PTP(thickness x width)	0.02×260 mm
	PVC卷料外径		PVC roll diameter	<φ380 mm
	PTP卷料外径		PTP roll diameter	<φ260 mm
	PVC & PTP卷心孔径		PVC& PTP roll core size	φ68-75 mm
最高装盒速度		Max speed	260盒/分钟 cartons/min	
装盒机 Cartoning machine	纸 盒 Carton	质量要求	Carton material	250-350g/m ²
		尺寸范围	Carton size range (L×W×H)	(70-180)×(35-80)×(14-50)mm
	说 明 书 Leaflet	质量要求	Leaflet material	60-70g/m ²
		未折叠尺寸范围	Unfolded leaflet size(L×W)	(80-300)×(90-180)mm
		折叠范围	Folding arrange	【1-4】折

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)



JD-DPH-260
自动高速泡罩包装机
Automatic High Speed Blister Packing Machine




概 述:
JD-DPH-260型全自动高速泡罩包装机集平板成型、辊筒热封为一体的高速泡罩包装机，适用于多种规格的糖衣片、素片、硬胶囊、软胶囊、异形片等药品的包装，也可用于形状与上述药物相近的小五金、电子元件、医疗器械及食品的包装。

Applications:
JD-DPH-260 High speed blister packing machine is suitable for blister packing of capsules, tablets, chewing gums, candies and similar shapes of hardware, electronic components, medical instruments and food. It adopts flat pressure forming to form strong and average blisters, roller type mesh sealing to ensure reliable sealing. The machine is equipped with batching system, embossing device and horizontal boundless punching to achieve high production capacity and greatly save packing material.

- 特 点:**
- 图文对版
 - 成型器更稳定、结构更加合理
 - 模具轻便耐用、调试操作简单。
 - 全伺服传动系统
 - 智能化PLC控制、触摸屏操作
 - PVC、铝箔更换简易方便

- Features:**
- Photocell register device.
 - More stable forming device, more reasonable structure.
 - Fast mould change, simple to set up, convenient to debug.
 - Full servo drive system.
 - Intelligent PLC control, touch screen operation.
 - Easy replace to change PVC, aluminum foil.

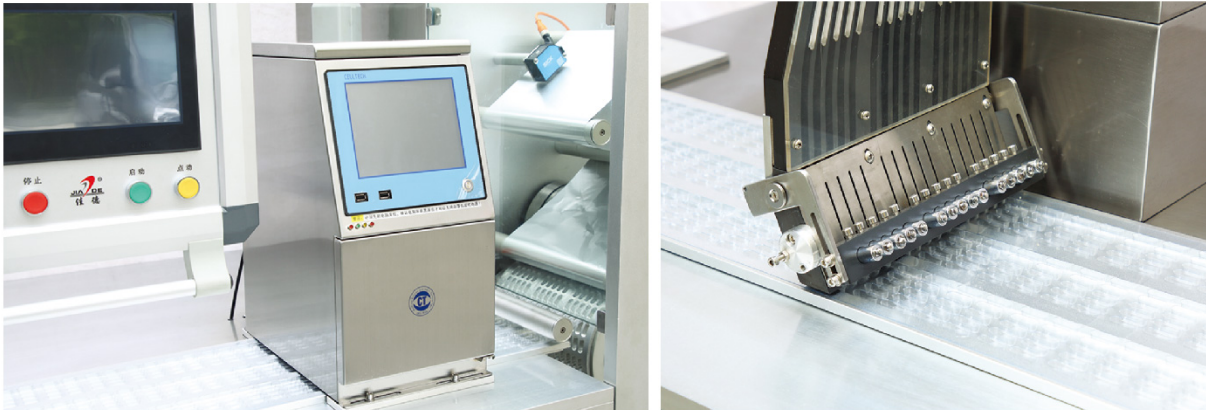

主要技术参数
Main technical parameter

JD-DPH-260		
最大冲切速度 Max. Punch Frequency	150次/分(或9.5米) 150 Stoke/min (or 9.5m)	
最大成型深度 Max. Forming depth	12mm	
最大成型面积 Max. Forming area	180 × 250mm(L × W)	
PVC(厚 × 宽) Standard PVC hard sheet	(0.25-0.35) × 260mm	
铝箔PTP(厚 × 宽) Standard PTP Aluminum foil	0.02 × 260mm	
PVC卷料外径 PVC roll diameter(OD)	< φ 380mm	
PTP卷料外径 PTP roll diameter(OD)	< φ 260mm	
PVC & PTP卷心孔径 PVC & PTP hole diameter of roll	φ 68-75mm	
外形尺寸 Overall dimension (L × W × H)	4550 × 1250 × 2115mm	
重 量 Weight	2200kg	
装机功率 Total power	18kw 380V/ 50Hz (可根据客户要求而定according to customer's requirement)	

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JD-DPH-320S

自动高速泡罩包装机

Automatic High Speed Blister Packing Machine

概述:

JD-DPH-320/320S全自动辊版泡罩机集平板成型、辊筒热封为一体的高速泡罩包装机，适用于多种规格的糖衣片、素片、硬胶囊、软胶囊、异形片等药品的包装，也可用于形状与上述药物相近的小五金、电子元件、医疗器械及食品的包装。

Applications:

JD-DPH-320/320S is a high-speed blister packing machine that integrates flat forming and roller hot sealing. It is suitable for packing sugar-coated tablets, plain tablets, hard capsules, soft capsules, special-shaped tablets and other drugs of various specifications. It can also be used for packing of hardware, electronic components, medical instruments and food whose shapes are similar to those of the above-mentioned drugs.

主要技术参数

Main technical parameters

JD-DPH-320S

最大冲切速度	Max. Punch Frequency	150次/分(Stoke/min) (或9.5米)
最大成型深度	Max. Forming depth	12mm
最大成型面积	Max. Forming area	180×310mm(L×W)
PVC (厚 × 宽)	Standard PVC hard sheet	(0.25-0.35)×320mm
铝箔PTP (厚 × 宽)	Standard PTP Aluminum foil	0.02×320mm
PVC卷料外径	PVC roll diameter(OD)	<φ380mm
PTP卷料外径	PTP roll diameter(OD)	<φ320mm
PVC & PTP卷心孔径	PVC & PTP hole diameter of roll	φ68-75mm
外形尺寸 (L × W × H)	Overall dimension (L×W×H)	3550×1100×1950mm
重量	Weight	2200kg
装机功率	Total power	24kw 380V/ 50Hz (可根据客户要求而定 according to customer's requirement)

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)



JDZ-600S
全伺服高速装盒机
Full Servo High Speed Cartoning Machine

概述:

该机是款全自动连续式超高速全伺服装盒机，集机、光、电、气一体化的高性能产品，每个主要机构都由一组或两组伺服单独控制，只需通过触摸屏上按键即可实现产品的更换，无需人工调试。实现真正意义上的自动化装盒机。适用于铝塑泡罩板、瓶子、袋状物品的自动装盒，并可与其配套形成包装生产线。

Applications:

This model is automatic high speed continuous cartoning machine which is high performance product incorporates pneumatic-photo-electro-mechanic, each main mechanism is individually controlled by one or two sets of servos, and customer just change the data on the touch screen can do the adjustment for different size product, without manually adjustment, fully realizing automation. It is suitable for automatic inserting ALU-PVC blister, bottle, soft tube, soft AL/AL strips and pouch into carton, also can link to matching machine to form production line.

主要技术参数
Main technical parameters

JDZ-600S

装盒速度 Encasing speed		600盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	350g/m²【视纸盒大小而定】Base on carton size
	尺寸范围 Dimension range (L×W×H)	(70-180)mm×(35-80)mm×(14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m²
	未折叠尺寸范围 Unfolded leaflet specification	(80-300)mm×(90-180)mm
	折叠范围 Fold range	【1-4】折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6Mpa
	耗 气 量 Air consumption	约280-320L/min
电 源 Power supply		380V 50Hz
总 功 率 Motor power		15kw
外形尺寸 Machine dimension (L×W×H)		5100mm×1850mm×2000mm
整机净重 Machine weight		约5500kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)



JDZ-450

全自动连续式高速装盒机

Automatic High Speed Continuous Cartoning Machine



概 述:

JDZ-450型全自动高速装盒机系我公司在引进国外先进技术的基础上自主创新设计的机型，并严格按医药行业"GMP"要求制造。具有高效率、高性能的生产能力，说明书折叠及传送、纸盒成形、后部推料机构相关技术达到欧美标准；简洁式的外观设计和后部连续式推料的结构使操作、维护更加简便，四等分双行星轮旋转式向外开盒并具在两次预形成装置确保纸盒的完全撑开成形。

该机是款全自动连续式高速装盒机，集机、光、电、气一体化的高性能产品，适用于铝塑泡罩板、瓶子、软管、软双铝、袋状物品的自动装盒，并可与其配套形成包装生产线。

Applications:

JDZ-450 Model automatic high speed cartoning machine is new model with innovation design base on bringing in foreign advanced technology, also strictly according to pharmaceutical industry "GMP" standard to manufacture. With high efficiency, high performance production capacity. Leaflet folding and conveying, carton opening and forming, posterior pushing structure and related technology all reach Europe and USA standards; Appearance simple design and posterior continuous pushing structure make operation and maintenance more convenient; Four equal double station planetary gear rotation type outward opening carton and under twice pre-forming device to ensure that carton open and form completely

This model is automatic high speed continuous cartoning machine with high performance product incorporates pneumatic-photo-electro-mechanic. It suitable for automatic inserting ALU-PVC blister, bottle, soft tube, soft ALU/ALU strips and sachet into carton, also can link to matching machine to form production line.

适用范围:

铝塑泡罩板、软膏、丸剂托盘、软双铝、袋状物品等类似物品。

Applications:

Is suitable for ALU-PVC blister, tube, pill tray, soft ALU strip, pouch, and similar product.



主要技术参数

Main technical parameters

JDZ-450

装盒速度 Encasing speed		450盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	350g/m²【视纸盒大小而定】Base on carton size
	尺寸范围 Dimension range (L × W × H)	(70-180)mm × (35-80)mm × (14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60g/m²
	未折叠尺寸范围 Unfolded leaflet specification	(80-300)mm × (90-180)mm
	折叠范围 Fold range	【1-4】折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6Mpa
	耗 气 量 Air consumption	220-240L/min
电 源 Power supply		380V 50Hz
功 率 Motor power		5kw
外形尺寸 Machine dimension (L × W × H)		4789mm × 1800mm × 2008mm
整机净重 Machine weight		5500kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)


JDZ-320
全自动高速装盒机
Automatic High Speed Cartoning Machine

概 述:

JDZ-320全自动高速装盒机系我公司集机、光、电、气一体化的高性能产品，相关技术达到欧美标准，具有高效率、高性能的生产能力，操作、维护更加简便。适用于铝塑泡罩板、瓶子、软管、软双铝、袋状物品的自动装盒，并可与其配套形成包装生产线。

Applications:

JDZ-320 high-speed cartoning machine is a high-performance product of our company that integrates machinery, light, electricity and gas. The relevant technology has reached European and American standards. It has high efficiency and high-performance production capacity, and the operation and maintenance are faster and more applicable. It is used for automatic packing blister, bottles, tubes, stips and bag-like items, and can be linked with other machine to form a packaging production line.

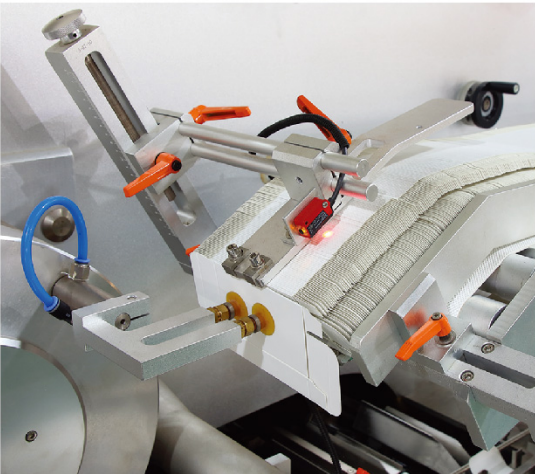

主要技术参数
Main technical parameters

JDZ-320

装盒速度 Encasing speed		320盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	250-350g/m ² 【视纸盒大小而定】 Base on carton size
	尺寸范围 Dimension range (L × W × H)	(70-180)mm × (35-80)mm × (14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m ²
	未折叠尺寸范围 Unfolded leaflet specification	(80-300)mm × (90-180)mm
	折叠范围 Fold range	【 1-4 】 折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥ 0.6Mpa
	耗 气 量 Air consumption	160-200L/min
电 源 Power supply	380V 50Hz	
功 率 Motor power	5.8kw	
外形尺寸 Machine dimension (L × W × H)	4770mm × 1706mm × 2203mm	
整机净重 Machine weight	3100kg	

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JDZ-260

全自动连续式高速装盒机

Automatic High Speed Continuous Cartoning Machine



概 述:

JDZ-260型全自动高速装盒机系我公司在引进国外先进技术的基础上自行创新设计的机型，并严格按医药行业“GMP”要求制造。具有高效率、高性能的生产能力，说明书折叠及传送、纸盒成形、后部推料机构相关技术达到欧美标准；简洁式的外观设计和后部连续式推料的结构使操作、维护更加简便；四等分双行星轮旋转式向外开盒并具在两次预形成装置确保纸盒的完全撑开成形。

该机是款全自动连续式高速装盒机，集机、光、电、气一体化的高性能产品，可与其它配套形成包装生产线。

Applications:

JDZ-260 automatic high speed cartoning machine is new model with innovation design base on bringing in foreign advanced technology, also strictly according to pharmaceutical industry "GMP" standard to manufacture. With high efficiency, high performance production capacity. Leaflet folding and conveying, carton opening and forming, posterior pushing structure and related technology all reach Europe and USA standards; Appearance simple design and posterior continuous pushing structure make operation and maintenance more convenient; four equal double row star wheel rotation type outward opening carton and under twice pre-forming device to ensure that carton open and form completely.

This model is automatic high speed continuous cartoning machine with high performance product incorporates pneumatic-photo-electro-mechanic. Also can link to matching machine to form production line.

适用范围:

铝塑泡罩板、软膏、丸剂托盘、软双铝、袋状物品等类似物品。

Applications:

Is suitable for ALU-PVC blister, tube, pill tray, soft ALU strip, pouch, and similar product.



主要技术参数

Main technical parameters

JDZ-260

装盒速度 Encasing speed		260盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	250-350g/m² 【视纸盒大小而定】 Base on carton size
	尺寸范围 Dimension range (L × W × H)	(70-180)mm × (35-80)mm × (14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m²
	未折叠尺寸范围 Unfolded leaflet specification	(80-300)mm × (90-180)mm
压缩空气 Compressed air	折叠范围 Fold range	【 1-4 】折 (Fold)
	工作压力 Working pressure	≥0.6Mpa
电 源 Power supply	耗 气 量 Air consumption	160-200L/min
	功 率 Motor power	380V 50Hz
外形尺寸 Machine dimension (L × W × H)	整 机 净 重 Machine weight	5kw
		4770mm × 1591mm × 1868mm
		3000kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JDZ-260P
全自动连续式高速装盒机
Automatic High Speed Continuous Cartoning Machine



概 述:

JDZ-260型全自动高速装盒机系我公司在引进国外先进技术的基础上自行创新设计的机型，并严格按医药行业“GMP”要求制造。具有高效率、高性能的生产能力，说明书折叠及传送、纸盒成形、后部推料机构相关技术达到欧美标准；简洁式的外观设计和后部连续式推料的结构使操作、维护更加简便；四等分双行星轮旋转式向外开盒并具在两次预形成装置确保纸盒的完全撑开成形。

该机是款全自动连续式高速装盒机，集机、光、电、气一体化的高性能产品，可与其它配套形成包装生产线。

Applications:

JDZ-260 automatic high speed cartoning machine is new model with innovation design base on bringing in foreign advanced technology, also strictly according to pharmaceutical industry "GMP" standard to manufacture. With high efficiency, high performance production capacity. Leaflet folding and conveying, carton opening and forming, posterior pushing structure and related technology all reach Europe and USA standards; Appearance simple design and posterior continuous pushing structure make operation and maintenance more convenient; four equal double row star wheel rotation type outward opening carton and under twice pre-forming device to ensure that carton open and form completely.

This model is automatic high speed continuous cartoning machine with high performance product incorporates pneumatic-photo-electro-mechanic. Also can link to matching machine to form production line.

适用范围:

药瓶（圆瓶，扁瓶）眼药水瓶等类似物品。

Applications:

Is suitable for medicine bottle (round bottle, flat bottle), eyedropper bottle and similar product.



主要技术参数
Main technical parameters

JDZ-260P

装盒速度 Encasing speed		260盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	250-350g/m²【视纸盒大小而定】Base on carton size
	尺寸范围 Dimension range (L × W × H)	(70-180)mm × (35-80)mm × (14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m²
	未折叠尺寸范围 Unfolded leaflet specification	(80-300)mm × (90-180)mm
压缩空气 Compressed air	折叠范围 Fold range	【1-4】折 (Fold)
	工作压力 Working pressure	≥0.6Mpa
电 源 Power supply	耗 气 量 Air consumption	160-200L/min
	功 率 Motor power	380V 50Hz
外形尺寸 Machine dimension (L × W × H)	整 机 净 重 Machine weight	5kw
		6273mm × 1591mm × 1868mm
		3400kg

注意：数据如有更改，恕不另行通知 (Notes: If any change of data, we will not notify further.)

JDZ-180

连续式自动装盒机

Automatic Continuous Cartoning Machine

概 述:

JDZ-180型全自动连续式装盒机系我公司在结合国内外多项先进技术的基础上自行创新研发的机型，并严格按医药行业'GMP'要求制造。稳定性能高、结构简洁、操作易懂的特点；说明书自动折叠及传送、纸盒吸取成形、多工位伺服跟速推料机构相关技术达到行业先进标准；简洁式的外观设计和多工位伺服跟速推料的结构使操作、维护更加简便；双工位行星轮外环转式向外开盒并具有预成形装置确保纸盒的完全撑开成形。

该机是款全自动连续式装盒机，集机、光、电、气一体化的高性能产品，适用于铝塑泡罩板、瓶子、软管、软双铝、袋状等物品的自动装盒，并可与其配套形成包装生产线。



Applications:

JDZ-180 Model fully automatic continuous cartoning machine is a new model which developed by our company on the basis of both home and abroad many advanced technologies, and it is manufactured strictly according to the requirements of pharmaceutical industry "GMP". The characteristics with stable performance, simple structure, easy to operate; Leaflet automatic fold and transmit, carton suck and forming, multi position servo tracking speed pushing product structure related technology to achieve advanced industry standards; Simple design style and multi position servo tracking speed pushing product structure makes operation and maintenance more convenient; Double station planetary gear rotation type outward opening carton with pre-forming device to ensure that carton open and form completely.

This machine is automatic continuous cartoning machine with high performance products incorporates pneumatic-photo-electro-mechanic. It's suitable for inserting blister, bottles, tube, soft ALU/ALU strips, sachet and other product into carton, also can link to matching other machine to form production line.




适用范围:

铝塑泡罩板、软膏、托盘、软双铝、瓶状物、袋状物等类似物品。

Applications:

It's suitable for ALU-PVC blister,tube,tray, soft ALU/ALU strips,bottle ,sachet and other similar product

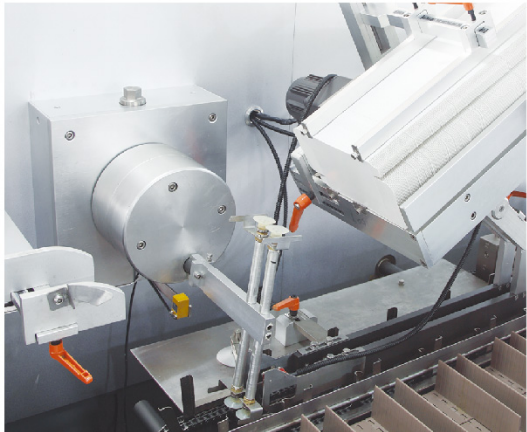

主要技术参数

Main technical parameters

JDZ-180

装盒速度 Encasing speed		180盒/分钟
纸 盒 Carton	质量要求 Quality requirement	250-350g/m ² 【视纸盒大小而定】 Base on carton size
	尺寸范围 Dimension range (L × W × H)	(70-165)mm × (35-85)mm × (14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m ²
	未折叠尺寸范围 Unfolded leaflet specification	(80-300)mm × (90-180)mm
	折叠范围 Fold range	【 1-4 】 折
压缩空气 Compressed air	工作压力 Working pressure	≥ 0.6mpa
	耗 气 量 Air consumption	约120-180L/min
电 源 Power supply	380V 50HZ	
功 率 Motor power	4.5kw	
外形尺寸 Machine dimension (L × W × H)	4439mm × 1560mm × 1965mm	
整机净重 Machine weight	约1750kg	

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JDZ-120 III
全自动卧式装盒机
Automatic Horizontal Cartoning Machine

概 述:

该设备是我公司结合国内外先进技术开发研制的新型机型，集光、电、气、机一体化的高科技产品。从而使设备性能和工作效率得到了大幅度提高，实现快速装盒要求，且在快速运行时仍保持平稳、可靠状态。

该机型适用泡罩成形版状物品的自动加料及装盒。自动加料机构调节方便、可在操作屏上任意设定需装盒的版数。在线泡罩版检测、说明书折叠（1至4折叠）与传送、说明书检测、纸盒吸取成形与传送、物料入盒、压印批号、纸盒两端纸舌封装（也可适用热熔胶）、缺料剔除及成品输出等全过程均属自动完成。

Applications:

This equipment is new model developping base on integrated domestic and foreign vanguard technology. It is high technology product incorporates pneumatic-photo-electro-mechanic which improve by a large on performance of equipment and working efficiency, realize encasing fast, keep running steady and reliable when fast running.

This machine is suitable for blister package product, adjust automatic feeding structure conveniently, setup quantity of blisters on touch screen randomly. On line product feeding and detecting, leaflet fold(1-4folds) and feeding, leaflet detecting, canton opening and forming, products and leaflet pushing into carton, printing batch number, sealing carton with tuck-in or hot melt glue device. Automatically reject lacking of leaflet or prodcut and finished product out.



适用范围:

铝塑板 铝塑铝等类似物品。

Applications:

Is suitable for ALU-PVC blister, ALU-ALU blister and similar product.

特 点:

- PLC自动控制系统、变频调速，电器元件均采用国际知名品牌。
- 采用人机界面操作系统。
- 机械过载自动停机。
- 自动剔除缺包装物和说明书的纸盒。
- 故障显示、报警和成品计数。
- 性能稳定、操作简便易懂。

Features:

- International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- Adopt human-machine operation system.
- Automatically stop when machine is overload.
- Automatically reject lacking of package product and leaflet.
- Automatically display trouble, Alarm and count finished products.
- Stable performance,operation is easy.



主要技术参数

Main technical parameters

JDZ-120(卧式 Horizontal)

装盒速度 Encasing speed		30-120盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	250-350g/m ² 【视纸盒大小而定】 Base on carton size
	尺寸范围 Dimension range (L × W × H)	(70-180)mm × (35-85)mm × (14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m ²
	未折叠尺寸范围 Unfolded leaflet specification	(80-250)mm × (90-180)mm
	折叠范围 Fold range	【 1-4 】折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥ 0.6Mpa
	耗 气 量 Air consumption	120-160L/min
电 源 Power supply		220V 50Hz
功 率 Motor power		1.5kw
外形尺寸 Machine dimension (L × W × H)		3155mm × 1260mm × 1770mm
整机净重 Machine weight		约1400kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JDZ-120P
全自动卧式装盒机
Automatic Horizontal Cartoning Machine

概 述:

该设备是我公司结合国内外先进技术开发研制的新型机型，集光、电、气、机一体化的高科技产品。从而使设备性能和工作效率得到了大幅度提高，实现快速装盒要求，且在快速运行时仍保持平稳、可靠状态。

该机型适用瓶状物品的自动加料及装盒。在线自动瓶子整理输送、说明书折叠（1至4次折叠）与传送、说明书检测、纸盒吸取成形与传送、物料入盒、压印批号、纸盒两端纸舌封装（也可适用热熔胶）、缺料剔除及成品输出等全过程均属自动完成。

Applications:

This equipment is new model developping base on integrated domestic and foreign advance technology. It is high technology product inco-rporates pneumatic-photo-electro-mechanic which improve by a large on performance of equipment and working efficiency, realize encasing fast, keep running steady and reliable when fast running.

This machine is suitable for automatic feeding bottle into carton. On line bottle unscramble and feeding, leaflet fold(1-4folds) and feeding, leaflet detecting, carton opening and forming, products and leaflet pushing into carton, printing batch number, sealing carton with tuck-in or hot melt glue. Automatically reject lacking of leaflet or prodcut and finished product out.



特 点:

- PLC自动控制系统、变频调速，电器元件均采用国际知名品牌。
- 采用人机界面操作系统。
- 机械过载自动停机。
- 自动剔除缺包装物和说明书的纸盒。
- 故障显示、报警和成品计数。
- 性能稳定、操作简便易懂。

Features:


- International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- Adopt human-machine operation system.
- Automatically stop when machine is overload.
- Automatically reject lacking of package product and leaflet.
- Automatically display trouble, Alarm and count finished products.
- Stable performance,operation is easy.

适用范围:

药瓶（圆瓶，扁瓶）眼药水瓶等类似物品。

Applications:

Is suitable for medicine bottle (round bottle, flat bottle), eyedropper bottle and similar product.

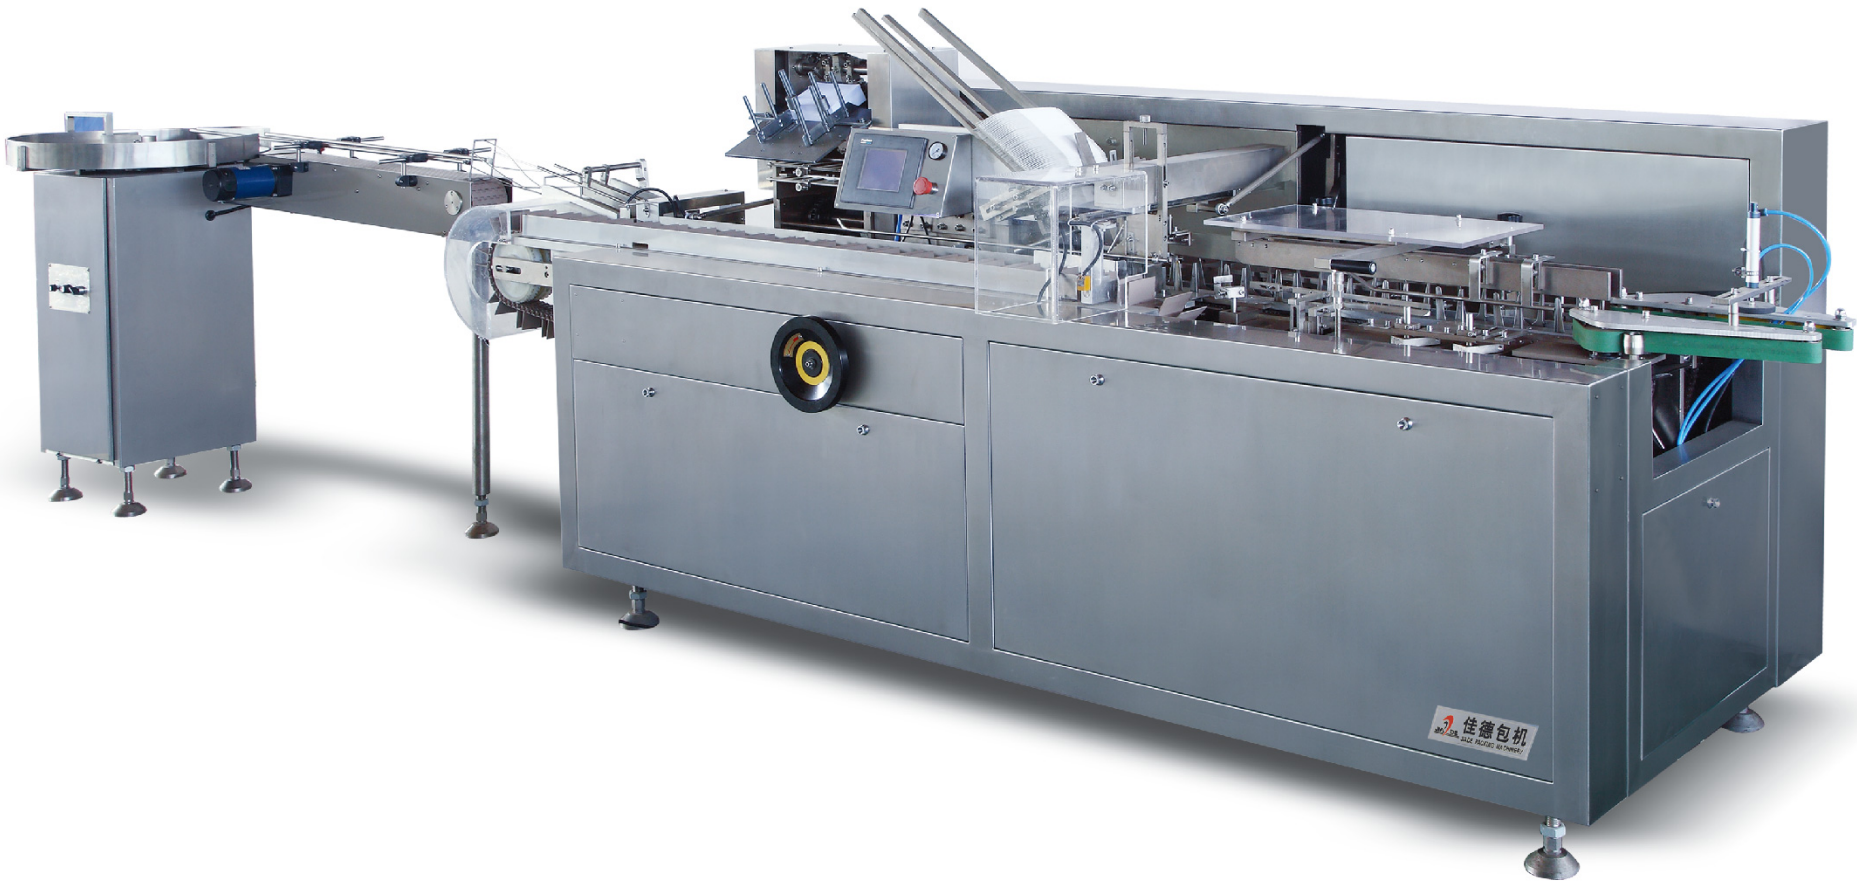

主要技术参数

Main technical parameters

JDZ-120P(卧式 Horizontal)

装盒速度 Encasing speed		30-120盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	250-350g/m ² 【视纸盒大小而定】 Base on carton size
	尺寸范围 Dimension range (L × W × H)	(70-180)mm × (35-85)mm × (14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m ²
	未折叠尺寸范围 Unfolded leaflet specification	(80-250)mm × (90-180)mm
	折叠范围 Fold range	【1-4】折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6Mpa
	耗 气 量 Air consumption	120-160L/min
电 源 Power supply	220V 50Hz	
功 率 Motor power	1.5kw	
外形尺寸 Machine dimension (L × W × H)	4950mm × 1260mm × 1770mm	
整机净重 Machine weight	约1600kg	

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JDZ-120D III
全自动卧式装盒机
Automatic Horizontal Cartoning Machine

概 述:

该设备是我公司结合国内外先进技术开发研制的新型机型，集光、电、气、机一体化的高科技产品。从而使设备性能和工作效率得到了大幅度提高，实现快速装盒要求，且在快速运行时仍保持平稳、可靠状态。

该机型适用于类似袋状物品的自动加料及装盒。在线物料检测、说明书折叠（1至4次折叠）与传送、纸盒吸取成形与传送、物料入盒、压印批号、纸盒两端纸舌封装（也可适用热熔胶）、缺料剔除及成品输出等全过程均属自动完成。

Applications:

This equipment is new model developping base on integ-rated domestic and foreign vanguard technology. It is high technology product incorporates pneumatic-photo-electro-mechanic which improve by a large on performance of equipment and working efficiency, realize encasing fast, keep running steady and reliable when fast running.
This machine is suitable sachets into carton. On line product feeding and detecting, leaflet fold (1-4folds) and feeding, leaflet detecting, canton opening and forming, products and leaflet pushing into carton, printing batch number, sealing carton with tuck-in or hot melt glue device. Automatically reject lacking of leaflet or prodcut and finished product out.



适用范围:

颗粒袋 避孕套 创口贴 软双铝 贴膏 咖啡袋 面膜贴等类似物品。

Applications:

Is suitable for sachet, condom, adhesive bandage, soft ALU strip, plaster, coffee bag, face mask and similar product

特 点:

- PLC自动控制系统、变频调速，电器元件均采用国际知名品牌。
- 采用人机界面操作系统。
- 机械过载自动停机。
- 自动剔除缺包装物和说明书的纸盒。
- 故障显示、报警和成品计数。
- 性能稳定、操作简便易懂。

Features:

- International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- Adopt human-machine operation system.
- Automatically stop when machine is overload.
- Automatically reject lacking of package product and leaflet.
- Automatically display trouble, Alarm and count finished products.
- Stable performance,operation is easy.



主要技术参数
Main technical parameters

JDZ-120D(卧式 Horizontal)

装盒速度 Encasing speed		30-120盒/分 (Cartons/min)
袋状加料数 Sachet quantity		1-12袋【视袋尺寸大小而定】Base on sachet or pouch size
纸 盒 Carton	质量要求 Quality requirement	250-350g/m ² 【视纸盒大小而定】Base on carton size
	尺寸范围 Dimension range (L × W × H)	(70-180)mm × (35-85)mm × (14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m ²
	未折叠尺寸范围 Unfolded leaflet specification	(80-250)mm × (90-180)mm
	折叠范围 Fold range	【1-4】折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6Mpa
	耗 气 量 Air consumption	260-300L/min
电 源 Power supply		380V 50Hz
功 率 Motor power		4kw
外形尺寸 Machine dimension (L × W × H)		3872mm × 1260mm × 1770mm
整机净重 Machine weight		约1600kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JDZ-120 III

全自动立式装盒机

Automatic Vertical Cartoning Machine

适用范围:

铝塑板 铝塑铝等类似物品。


Applications:

Is suitable for ALU-PVC blister, ALU-ALU blister and similar product.

概 述:

该设备是我公司结合国内外先进技术开发研制的新型机型，集光、电、气、机一体化的高科技产品。从而使设备性能和工作效率得到了大幅度提高，实现快速装盒要求，且在快速运行时仍保持平稳、可靠状态。

该机型适用多种品多规格泡罩物品的自动加料及装盒。上料机构调节方便、可在操作屏上任意设定需装盒的版数。在线物料输送与检测、说明书折叠（1至4次折叠）与传送、说明书检测、纸盒吸取成型与传送、物料入盒、压印批号、纸盒两端纸舌封装（也可适用热熔胶）缺料剔除及成品输出等过程均属自动完成。

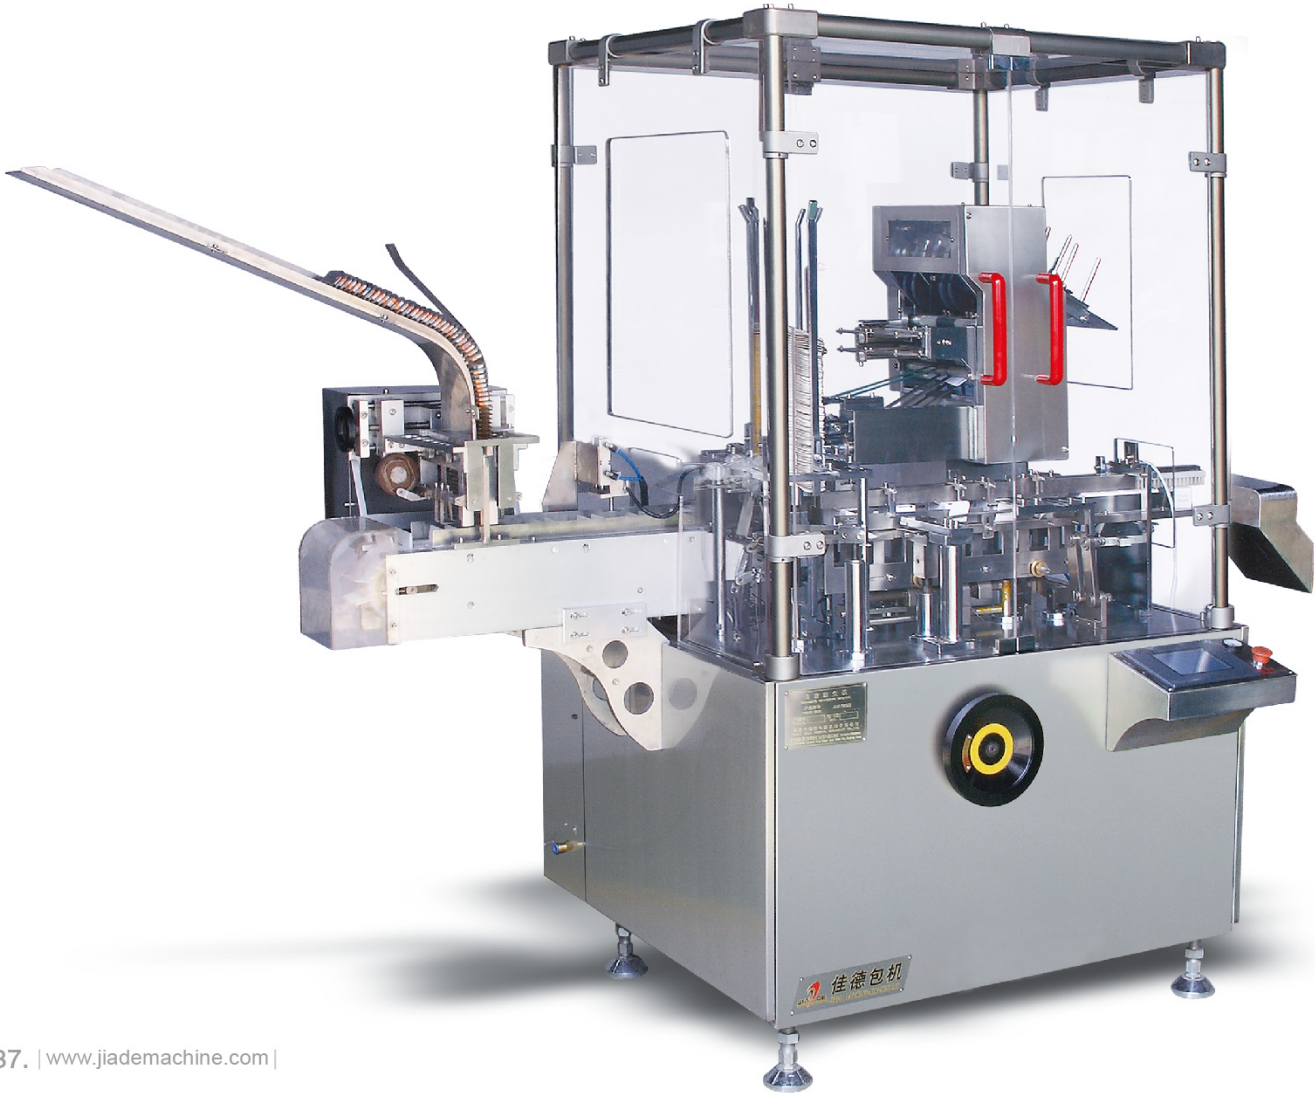

Applications:

This equipment is new model developping base on integrated domestic and foreign advance technology .It is high technology product incorporates pneumatic-photo-electro-mechanic which improve by a large on performance of equipment and working efficiency, realize encasing fast, keep running steady and reliable when fast running.

This machine is suitable for automatic feeding product of multi-variety multi-specifications blister into carton. Adjust automatic feeding structure conveniently,setup quantity of blisters on touch screen randomly.On line product feeding and detecting, leaflet fold(1-4folds) and feeding, leaflet detecting,canton opening and forming,products and leaflet pushing into carton, printing batch number,sealing carton with tuck-in or hot melt glue. Automatically reject lacking of leaflet or prodcut and finished product out.


特 点:

- PLC自动控制系统、变频调速，电器元件均采用国际知名品牌。
- 采用人机界面操作系统。
- 机械过载自动停机。
- 自动剔除缺包装物和说明书的纸盒。
- 故障显示、报警和成品计数。
- 性能稳定、操作简便易懂。



Features:

- International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- Adopt human-machine operation system.
- Automatically stop when machine is overload.
- Automatically reject lacking of package product and leaflet.
- Automatically display trouble, Alarm and count finished products.
- Stable performance,operation is easy.

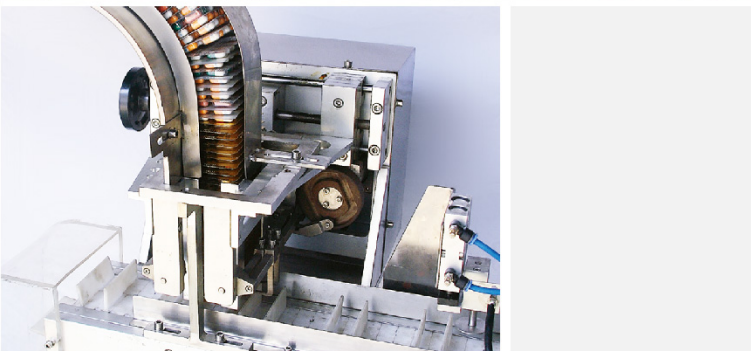

主要技术参数

Main technical parameters

JDZ-120 III(立式Vertical)

装盒速度 Encasing speed		30-120盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	250-350g/m²【视纸盒大小而定】Base on carton size
	尺寸范围 Dimension range (L×W×H)	(65-145)mm×(30-85)mm×(14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m²
	未折叠尺寸范围 Unfolded leaflet specification	(80-250)mm×(90-180)mm
	折叠范围 Fold range	【1-4】折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6Mpa
	耗 气 量 Air consumption	120-160L/min
电 源 Power supply		220V 50Hz
功 率 Motor power		1.5kw
外形尺寸 Machine dimension (L×W×H)		2111mm×1160mm×2221mm
整机净重 Machine weight		约1100kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JDZ-120P

全自动立式装盒机

Automatic Vertical Cartoning Machine

适用范围:

药瓶（圆瓶，扁瓶）眼药水瓶 等类似物品。


Applications:

Is suitable for medicine bottle (round bottle, flat bottle), eyedropper bottle and similar product.

概 述:

该设备是我公司结合国内外先进技术开发研制的新型机型，集光、电、气、机一体化的高科技产品。从而使设备性能和工作效率得到了大幅度提高，实现快速装盒要求，且在快速运行时仍保持平稳、可靠状态。

该机型适用瓶状物品的自动加料及装盒。在线自动瓶子整理输送、说明书折叠（1至4次折叠）与传送、说明书检测、纸盒吸取成形与传送、物料入盒、压印批号、纸盒两端纸舌封装（也可适用热熔胶）、缺料剔除及成品输出等全过程均属自动完成。

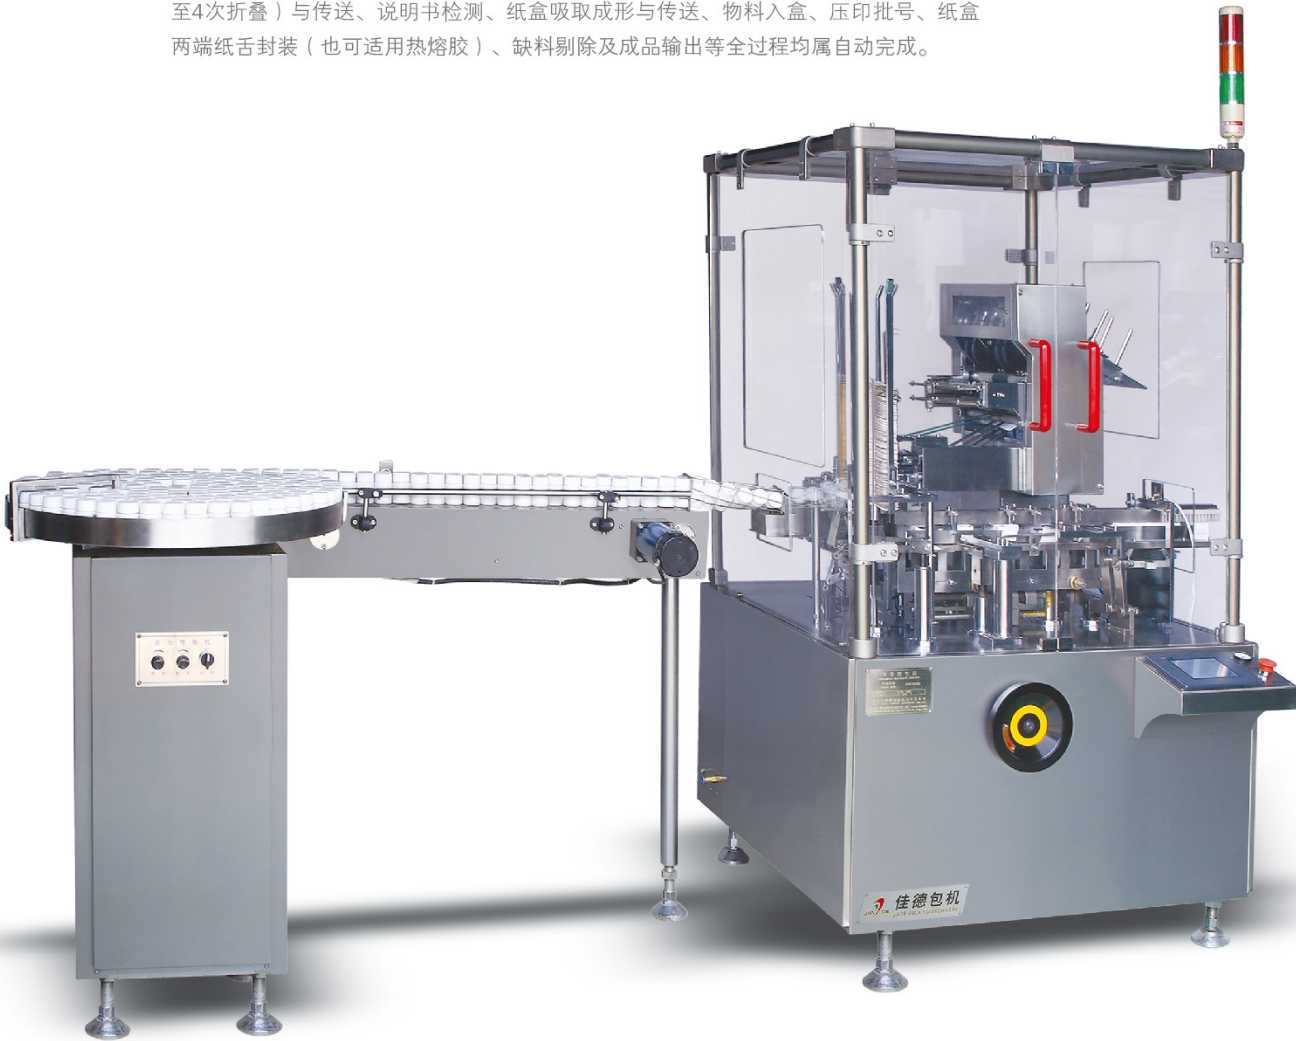

Applications:

This equipment is new model developping base on integrated domestic and foreign advance technology .It is high technology product incorporates pneumatic-photo-electro-mechanic which improve by a large on performance of equipment and working efficiency, realize encasing fast, keep running steady and reliable when fast running.

This machine is suitable for automatic feeding bottle into carton. On line bottle unscramble and feeding, leaflet fold(1-4folds) and feeding, leaflet detecting, canton opening and forming, products and leaflet pushing into carton, printing batch number, sealing carton with tuck-in or hot melt glue. Automatically reject lacking of leaflet or prodcut and finished product out.

特 点:

- PLC自动控制系统、变频调速，电器元件均采用国际知名品牌。
- 采用人机界面操作系统。
- 机械过载自动停机。
- 自动剔除缺包装物和说明书的纸盒。
- 故障显示、报警和成品计数。
- 性能稳定、操作简便易懂。

Features:

- International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- Adopt human-machine operation system.
- Automatically stop when machine is overload.
- Automatically reject lacking of package product and leaflet.
- Automatically display trouble, Alarm and count finished products.
- Stable performance,operation is easy.



主要技术参数

Main technical parameters

JDZ-120P(立式Vertical)

装盒速度 Encasing speed		30-120盒/分 (Cartons/min)
纸 盒 Carton	质量要求 Quality requirement	250-350g/m² 【视纸盒大小而定】 Base on carton size
	尺寸范围 Dimension range (L×W×H)	(65-145)mm×(30-85)mm×(14-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m²
	未折叠尺寸范围 Unfolded leaflet specification	(80-250)mm×(90-180)mm
	折叠范围 Fold range	【1-4】折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6Mpa
	耗 气 量 Air consumption	120-160L/min
电 源 Power supply		220V 50Hz
功 率 Motor power		1.1kw
外形尺寸 Machine dimension (L×W×H)		2923mm×1160mm×2221mm
整机净重 Machine weight		约1200kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JDZ-120D
全自动立式装盒机
Automatic Vertical Cartoning Machine

适用范围:

颗粒袋、避孕套、创口贴、软双铝、贴膏、咖啡袋、面膜贴等类似物品。

Applications:

Is suitable for sachet, condom, adhesive bandage, soft ALU strip, plaster, coffee bag, face mask and similar product.

概 述:

该设备是我公司结合国内外先进技术开发研制的新型机型，集光、电、气、机一体化的高科技产品。从而使设备性能和工作效率得到了大幅度提高，实现快速装盒要求，且在快速运行时仍保持平稳、可靠状态。

该机型适用于类似袋状物品的自动加料及装盒。在线物料检测、说明书折叠（1至4次折叠）与传送、纸盒吸取成形与传送、物料入盒、压印批号、纸盒两端纸舌封装（也可适用热熔胶）、缺料剔除及成品输出等全过程均属自动完成。



Applications:

This equipment is new model developping base on integ-rated domestic and foreign vanguard technology .It is high technology product incorporates pneumatic-photo-electro-mechanic which improve by a large on performance of equipment and working efficiency, realize encasing fast, keep running steady and reliable when fast running.
This machine is suitable sachets into carton. On line product feeding and detecting, leaflet fold(1-4folds) and feeding, leaflet detecting, carton opening and forming, products and leaflet pushing into carton, printing batch number, sealing carton with tuck-in or hot melt glue device. Automatically reject lacking of leaflet or prodcut and finished product out.

特 点:

- PLC自动控制系统、变频调速，电器元件均采用国际知名品牌。
- 采用人机界面操作系统。
- 机械过载自动停机。
- 自动剔除缺包装物和说明书的纸盒。
- 故障显示、报警和成品计数。
- 性能稳定、操作简便易懂。

Features:

- International famous brand of electrical component such as PLC touch screen, frequency inverters, etc.
- Adopt human-machine operation system.
- Automatically stop when machine is overload.
- Automatically reject lacking of package product and leaflet.
- Automatically display trouble, Alarm and count finished products.
- Stable performance,operation is easy.



主要技术参数
Main technical parameters

JDZ-120D(立式Vertical)

装盒速度 Encasing speed		30-120盒/分 (Cartons/min)
袋状加料数 Sachet quantity		1-12袋【视袋尺寸大小而定】Base on sachet or pouch size
纸 盒 Carton	质量要求 Quality requirement	250-350g/m ² 【视纸盒大小而定】Base on carton size
	尺寸范围 Dimension range (L × W × H)	(65-145)mm × (30-85)mm × (12-50)mm
说 明 书 Leaflet	质量要求 Quality requirement	60-70g/m ²
	未折叠尺寸范围 Unfolded leaflet specification	(80-250)mm × (90-180)mm
	折叠范围 Fold range	【1-4】折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6Mpa
	耗 气 量 Air consumption	260-300L/min
电 源 Power supply		380V 50Hz
功 率 Motor power		4kw
外形尺寸 Machine dimension (L × W × H)		2678mm × 1218mm × 2221mm
整机净重 Machine weight		约1500kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JD-K760
全自动高速薄膜束带捆扎机
Automatic High Speed Film Bundling Machine




概 述:

本机采用PE捆扎膜自动对盒装产品进行捆包。捆包形式多样可完成1垛多盒捆包也可完成多垛多盒捆包。设备实现自动记数、自动码垛、自动捆包。有效的节省包材、能耗，采用国际流行"阳台式"外观设计，纯铝材质的框架结构，全伺服驱动，稳定工作效率可达35捆/分钟。是目前中包替代中盒首选设备。广泛应用于制药、食品、化妆品、金融等行业。适合与高速装盒机联线使用。

Summary:

This machine is suitable for automatic packing carton product adopts PE bundle film. Packing forms is various such as 1 stack with many boxes also many stacks with many boxes. Machine with these function: Automatic counting, automatic stacking, automatic bundle. Effective to save material, energy consumption, adopt international popular "balcony" appearance design, structure of pure aluminum, servo drive, stable working efficiency can reach 35 packs/min. it's currently the preferred equipment which middle packing instead of the middle box. Widely used in pharmaceutical, food, cosmetics, finance and other industries. Suitable for connecting with high-speed cartoning machine.

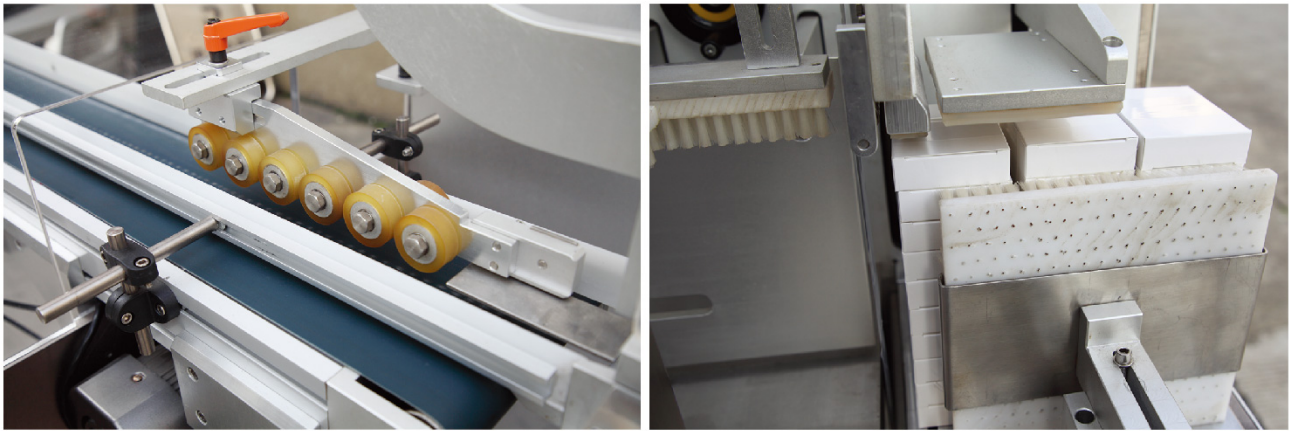

主要技术参数
Main technical parameter

捆包尺寸	Package size range	Max: 260 × 200 × 120mm Min: 80 × 20 × 40mm(L × W × H)
使用包材	Wrapper material	PE膜 PE Film
适用扎带规格	Bundle film width	35-60mm
捆扎膜厚度	Bundle film thickness	50-80um
捆扎速度	Speed boxes/min	≥30捆/分钟 packs/min
工作电源	Power supply	220V/50Hz
设备功率	Power	2.8KW
工作气压	Air Pressure	0.6-0.8MPa
排 气 量	Air consumption	0.3m³/min
外型尺寸	Machine Dimensions	1890 × 1000 × 1800mm (L × W × H)
输送尺寸	Conveyor size	1150 × 200 × 850mm (输送高度 conveyor height 800mm，底角 basic angle 80mm可调 adjustment)
总 重 量	Weight	600kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JD-RFW-380

全自动往复式包装机

Reciprocating Automatic Packing Machine



主要性能和结构特点:

Main performance and structure features:

- 主机伺服调速: 主机采用进口伺服电机调速, 能适合各种包装材料。
- 可编程序控制: 采用PLC可编程序控制器, 使整机运行程序化。
- 触摸式显示屏: 机器速度、设置袋长、实际袋长、包装产量都会在触摸屏上显示, 一目了然。
- 故障自动诊断: 故障自动诊断显示一目了然。
- 电眼色标跟踪: 自动跟踪, 使对标快速、准确。
- 三组自动温度: 每个加热部位、都采用温控仪自动控温, 提高封口质量。
- 可调式制袋器: 适合多种格包装材料。
- 自动折边装置: 对胶囊铝塑药版重叠高度在20-55mm可以进行折边包装。
- 配伺服下料器: 板数可自行设定1-5板。

- Host servo speed control: host imported servo motor speed can be suitable for a variety of packaging materials.
- Programmable control: PLC programmable controller, so that the whole of the program.
- Touch screen: the machine speed, bag length set, actual bag length, packing output will be displayed on the touch screen at a glance.
- Automatic fault diagnosis: automatic fault diagnostic display at a glance.
- Electric eye tracking: automatic tracking, benchmarking so fast and accurate.
- Automatic temperature three groups: each of the heating parts, temperature controller automatic temperature control are used to improve the sealing quality.
- Adjustable bag: suitable for a variety of packaging materials grid.
- Automatic folding device: aluminum capsule version of the drug can be overlapped height 20-55mm hemming packaging.
- Under the feeder with servo: plate number plate can set 1-5.

适用范围:

专业用于胶囊板块、片剂板块、以及类似铝塑罩罩板块的防潮袋包装。

Scope of application:

Professional for packing capsule, tablet, and similar ALU/PVC blister into pillow bag.

主要技术参数

Main technical parameter

生产速度 Capacity	40-220包/分钟 Bags/min
制袋尺寸 Bag forming size	L:80-160mm W:40-80mm H:1-50mm
包装膜展开宽度 Film unfolding width	80-400mm
包装材料 Packing film	铝膜、镀铝膜、复合膜等
包装材料厚度 Packing film thickness	最佳厚度3-7丝
额定频率 Rated frequency	50Hz
空 压 机 Compressed air	> 0.15m ³ /min
额定电压 Voltage	220V
总 功 率 Total Power	7kw
机器重量 Machine weight	2000kg
外形尺寸 Dimension	6100×1080×2050mm (L×W×H)

注意: 数据如有更改, 恕不另行通知 (Notes:If any change of data,we will not notify further.)

JD-FW-300C

多功能全自动高速枕式包装机

Automatic High Speed Pillow Packaging Machine

概 述: Summary:

JD-FW-300C型多功能全自动高速枕式包装机主要租用于医药、食品等行业采用铝塑包装的板块的袋包装, 起到了防潮、防尘、避光的作用, 同时提高了产品档次和附加值, 使用该机比手工制袋包装节约成本20%以上, 而且可与铝塑包装机、装盒机、热收缩包装机等机械联动生产。

JD-FW-300C multifunctional automatic high speed pillow packing machine is suitable for blister packing in pillow bag which mainly used for medicine, food industry with moisture, dust, light effect, at the same time, improve product quality and added value, after use this machine it can save cost more than 20% compared to bag packaging by hand, it can link to blister packing machines, cartoning machine ,shrink packing machine



主要技术参数

Main technical parameter

生产速度	Production capacity	40-130 packs/min包/分钟(根据包装材料而定)(正常生产速度为每分钟120包)
制袋尺寸	Pack size	L:80-160mm W:40-80mm H:1-50mm
包装膜展开宽度	Film width	80-400mm
包装材料	Packing material	铝膜、镀铝膜、复合膜等 Aluminium film, Aluminized film, Composite film, etc.
包装材料厚度	Packing material thickness	最佳厚度3-7丝 Most suitable thickness 30-70micron meter
额定频率	Rated frequency	50Hz
空压机	Air compressor	> 0.15m ³ /min
额定电压	Rated voltage	220V
总功率	Total power	5kw
机器重量	Weight	1000kg
外形尺寸	Overall dimension	3700×1250×2050mm(L×W×H)

注意: 数据如有更改, 恕不另行通知 (Notes:If any change of data,we will not notify further.)

JD-MOC-300

透明膜三维包装机

Transparent Membrane Three-dimensional Packaging Machine

概 述: Summary:

本机广泛适用于药品、保健品、食品、日用化工品、电器电子类产品中、大型方盒物品的外表装璜包装。采用PLC人机界面控制；送膜系统采用步进电机控制，可任意调节送膜尺寸；其余动作全部采用气缸驱动，运行稳定可靠。利用输送带供给包装物品，由送膜、折叠、热封等一系列动作来封装物品。使包装物达到紧密、装璜、美观、防伪、防潮的效果。

This machine is suitable for packing appearance decoration of big box widely used in the pharmaceutical, health care products, food, daily chemical products, electronic products . PLC human-machine interface control; film feeding system is controlled by step motor, adjustable film feeding size; the rest movement use cylinder drive, running stably and reliably. By supply of packaging product by conveyor belt, film feeding, folding, heat sealing and a series of actions to package goods to make packaging product to reach decoration, beautiful, anti-counterfeiting, moisture-proof effect.



主要技术参数

Main technical parameter

包装材料、卷料型芯内径	Packing material / core inner size	BOPP膜、热封收缩膜、PVC烟膜 BOPP film, heat seal shrink film, PVC film	Φ76mm
包装速度	Packing speed	10-30包/分 pcs/min	
包装物尺寸	Packing size	长(lenhth: 60-300mm 宽(width): 50-250mm 厚(thickness): 25-100mm	
电 源	Power supply	220V/50HZ	
功 率	Power supply	6.5KW	
整 机 重 量	Machine weight	750KG	
主气路工作压力	Working pressure	0.6MPa	
封膜合格率	Sealing qualitification rate	> 99%	
封膜破损率	Sealing breakage rate	< 1%	
外 型 尺 寸	Dimension	主机(Main body) 2200 × 930 × 2130mm	

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

JD-MOC-500

透明膜三维包装机

Transparent Membrane Three-dimensional Packaging Machine

概 述: Summary:

MOC型系列全自动透明膜三维裹包机适用于药品、保健品、食品、化妆品及烟草等行业，作为小盒的集束包装并代替中盒，尤其适用于具有高品质包装的药品、保健品等，是新一代理想的产品包装机械。本产品可对条盒自动上料、堆叠、包装、热封、整理并自动粘贴防伪易拉线。它采用透明质薄膜完全包装在产品外面，在充分显示物品的外观、增加美观及价值感、提高产品的展销性的同时，保证包装后的物品能全密封、防潮、防污染、其拥有的瞬间封口技术，属国家首创。本系列采用伺服送膜技术，送膜精准、调试方便。

MOC Series Automatic Cellophane wrapping machine is suitable for pharmaceutical, health care products, food, cosmetics and tobacco industries, as a small box instead of the disease cluster packing boxes, especially for high quality packaging of medicines, health products, etc., is a new generation ideal product packaging machinery. This product adopts Italian advanced technology, with international advanced level and the national patent. This product is available on the barrel automatic feeding, stacking, packing, sealing, finishing and easily self-adhesive cable, it uses a transparent film-completely outside of the product packaging, in full appearance of the item, add a sense of beauty and value, improve product exhibition of the same time, ensure that the packaged goods can be sealed, moisture-proof, anti-pollution, which has a moment sealing technology, a national initiative, This series uses Servo film feeding precise, convenient debugging.



主要技术参数

Main technical parameter

包装速度	Speed of Packing	(10-35)中盒/分钟 boxes/min
包装尺寸	Packing size	(300-80) × (200-50) × (120-30)mm (L × W × H)
包装材料	Cellophane	BOPP 烟膜 Smoke Film PVC
厚 度	Thinkness	0.021-0.028mm
宽 度	Width	可根据包装尺寸选择 optional based on the dimensions of packing box
电 源	Power supply	三相五线制 in three-phase and five system 50HZ/AC380V
总 功 率	Total power	3.5KW
工作气压	Working pressure	≥0.3MPa
外形尺寸	Shape size	2000 × 1000 × 1400mm
机器重量	Weight of machine	600kg

注意：数据如有更改，恕不另行通知 (Notes:If any change of data,we will not notify further.)

